





Application No.: 10/071,595
Inventor: Douglas H. MASSEY, *et al.*
Filed: February 8, 2002
Formal Drawing Sheet 2 of 12
Figure 2

FIG. 2



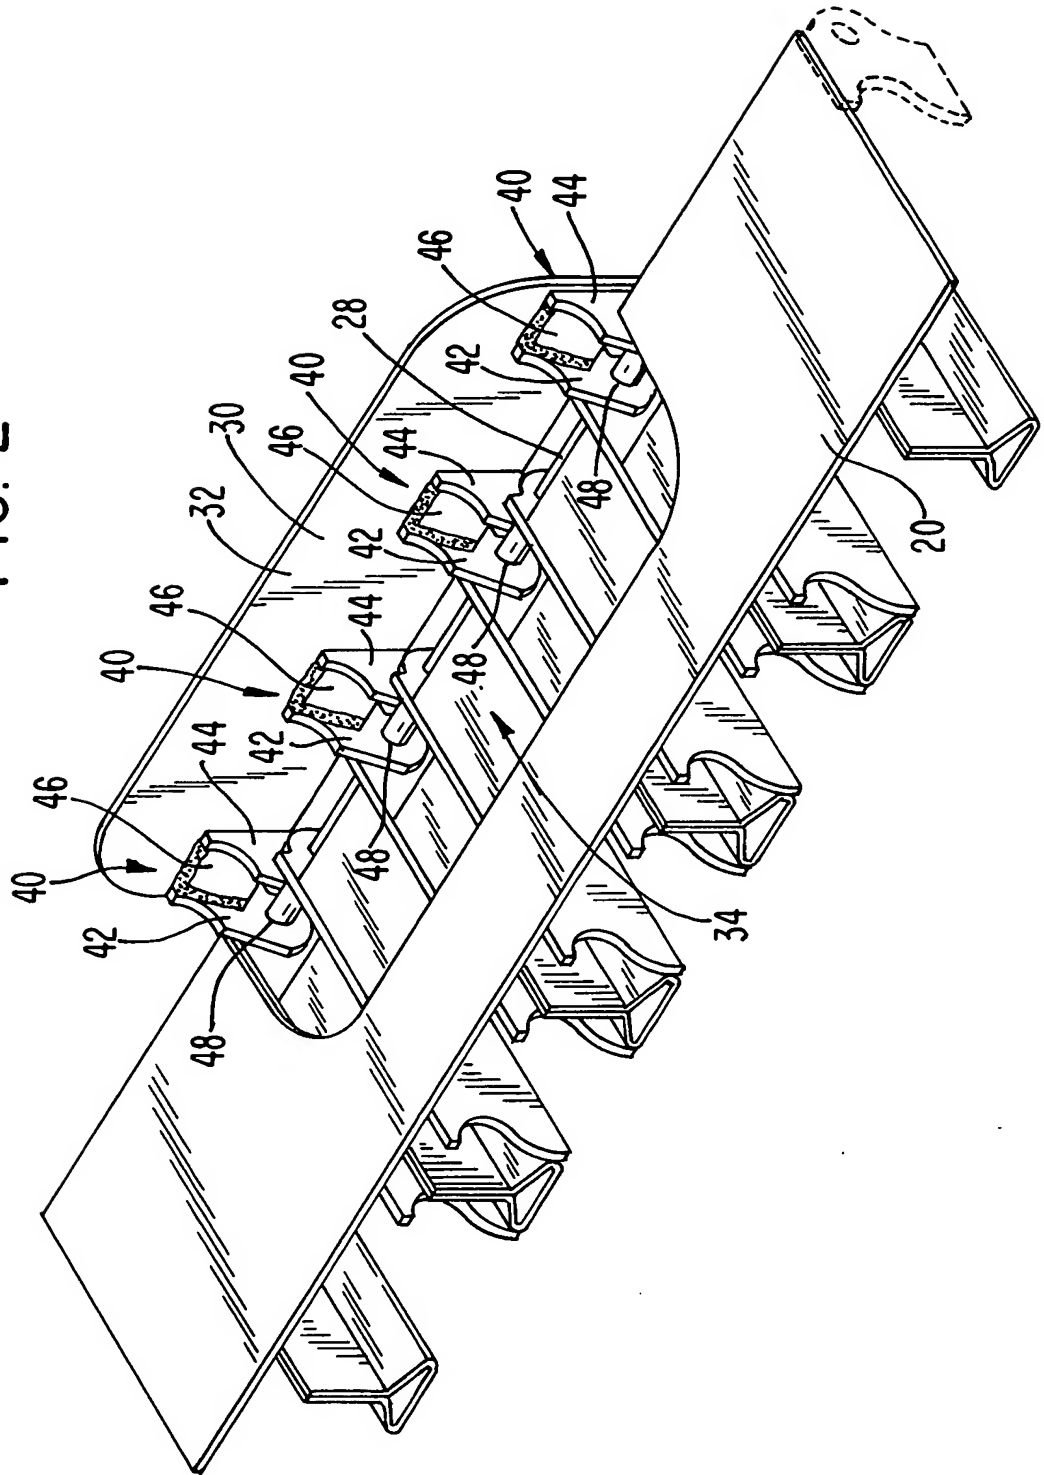


Application No.: 10/071,595
Inventor: Douglas H. MASSEY, *et al.*
Filed: February 8, 2002
Formal Drawing Sheet 3 of 12
Figure 3

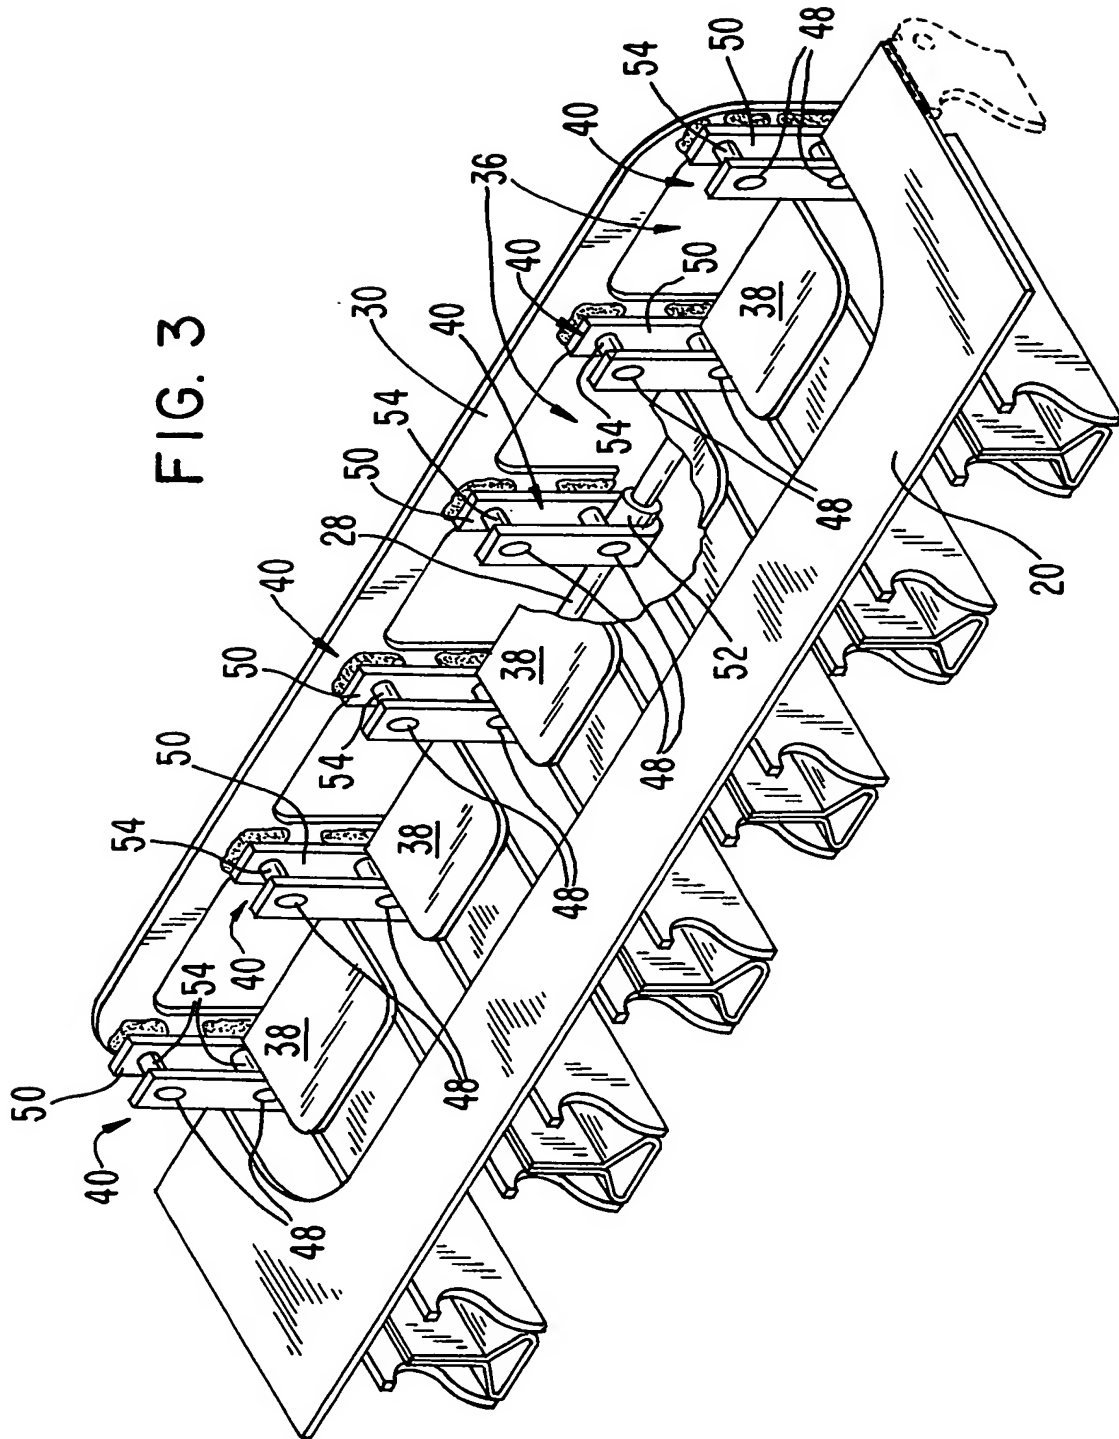



Application No.: 10/071,595
Inventor: Douglas H. MASSEY, *et al.*
Filed: February 8, 2002
Formal Drawing Sheet 4 of 12
Figure 4

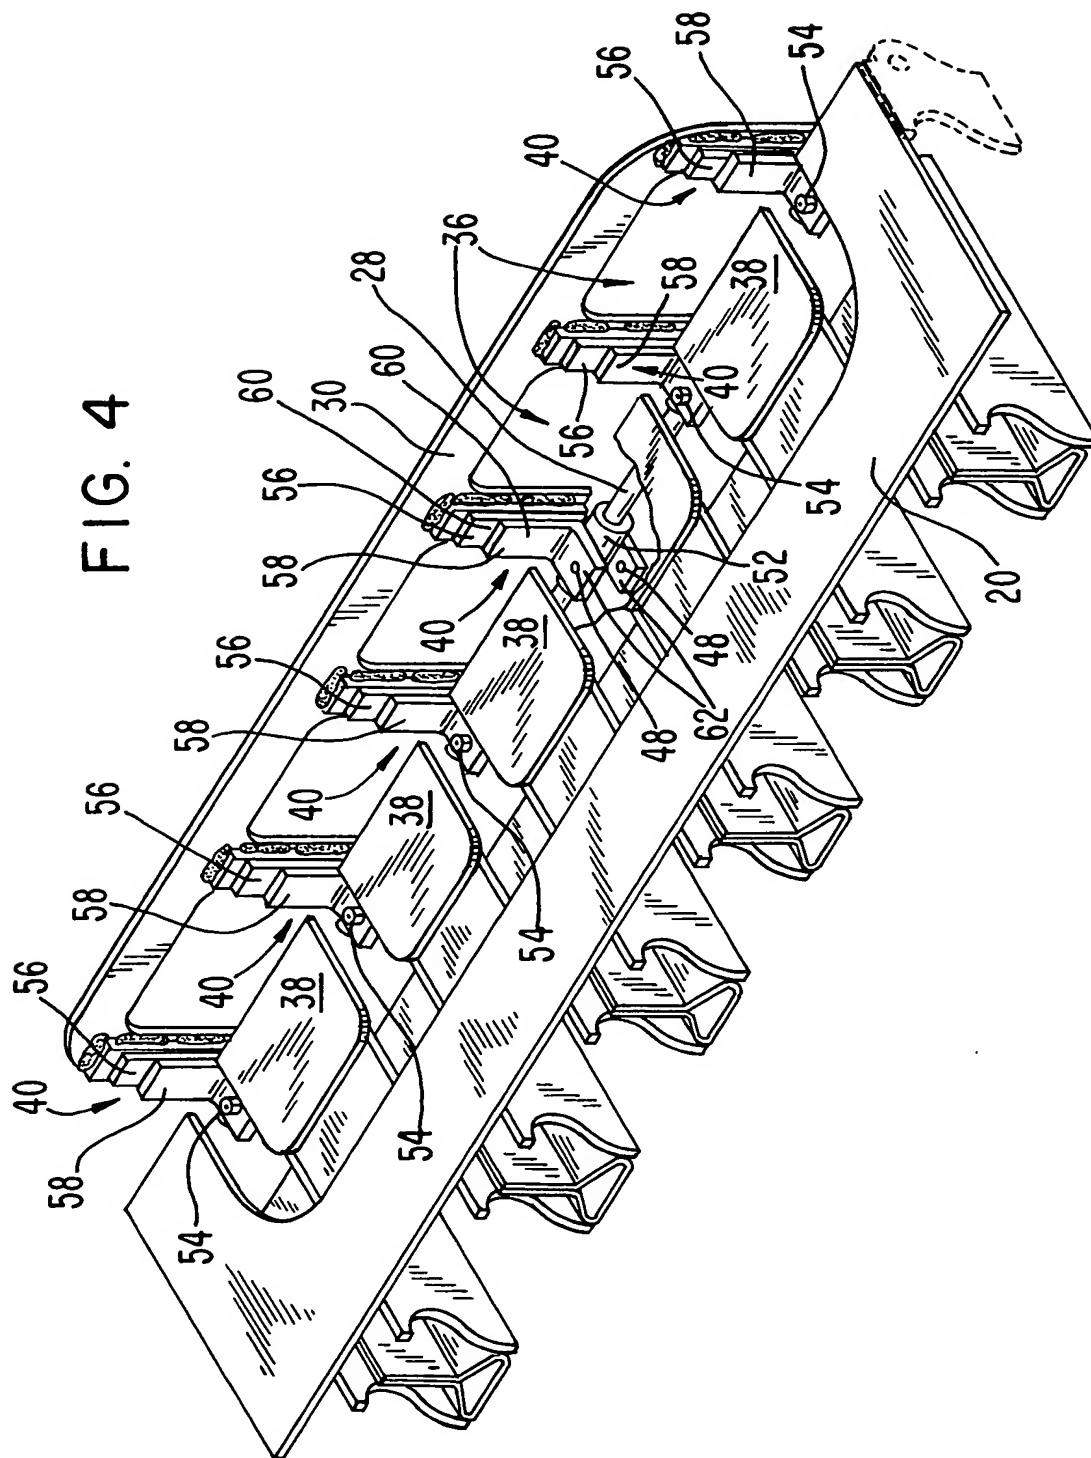




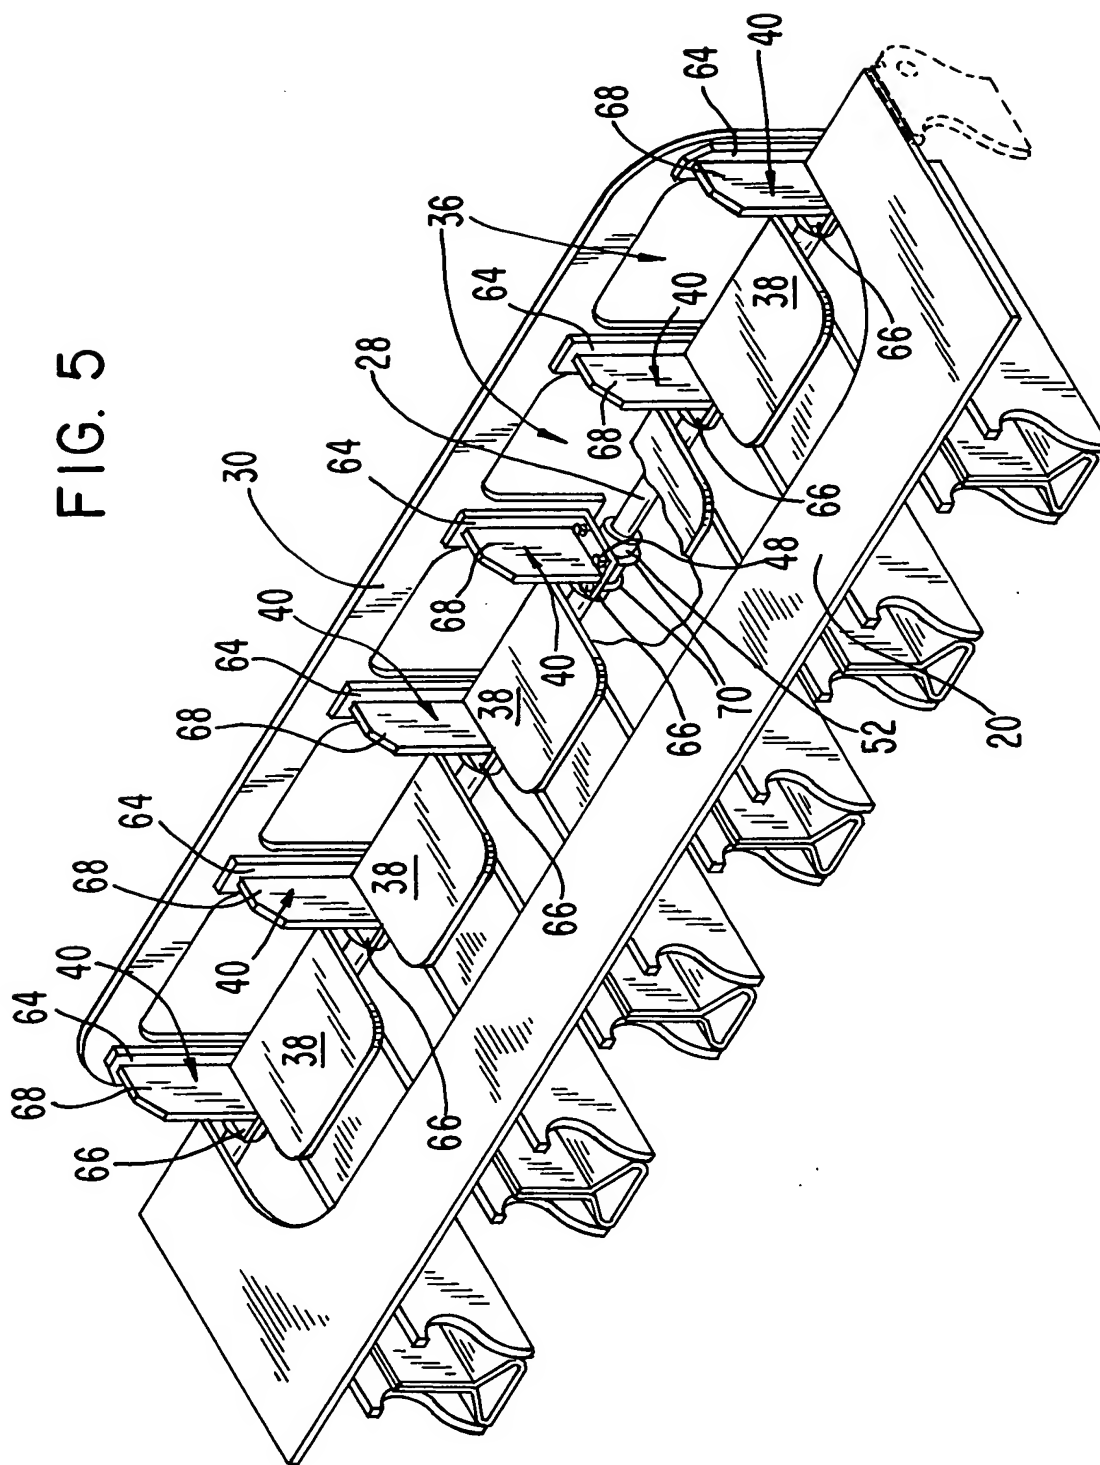




FIG. 6

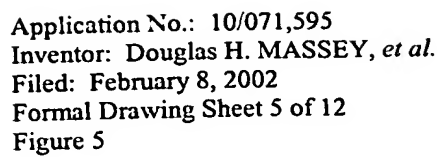


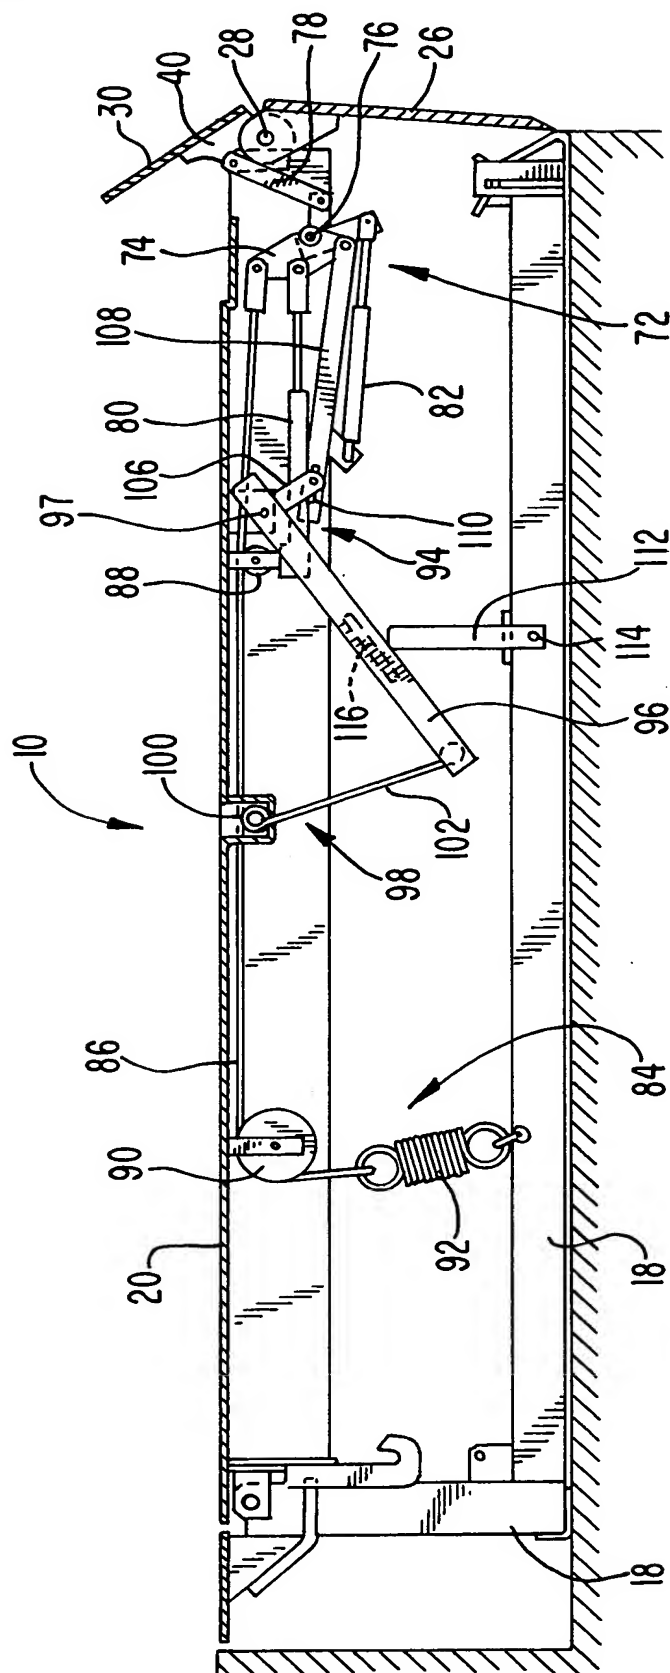


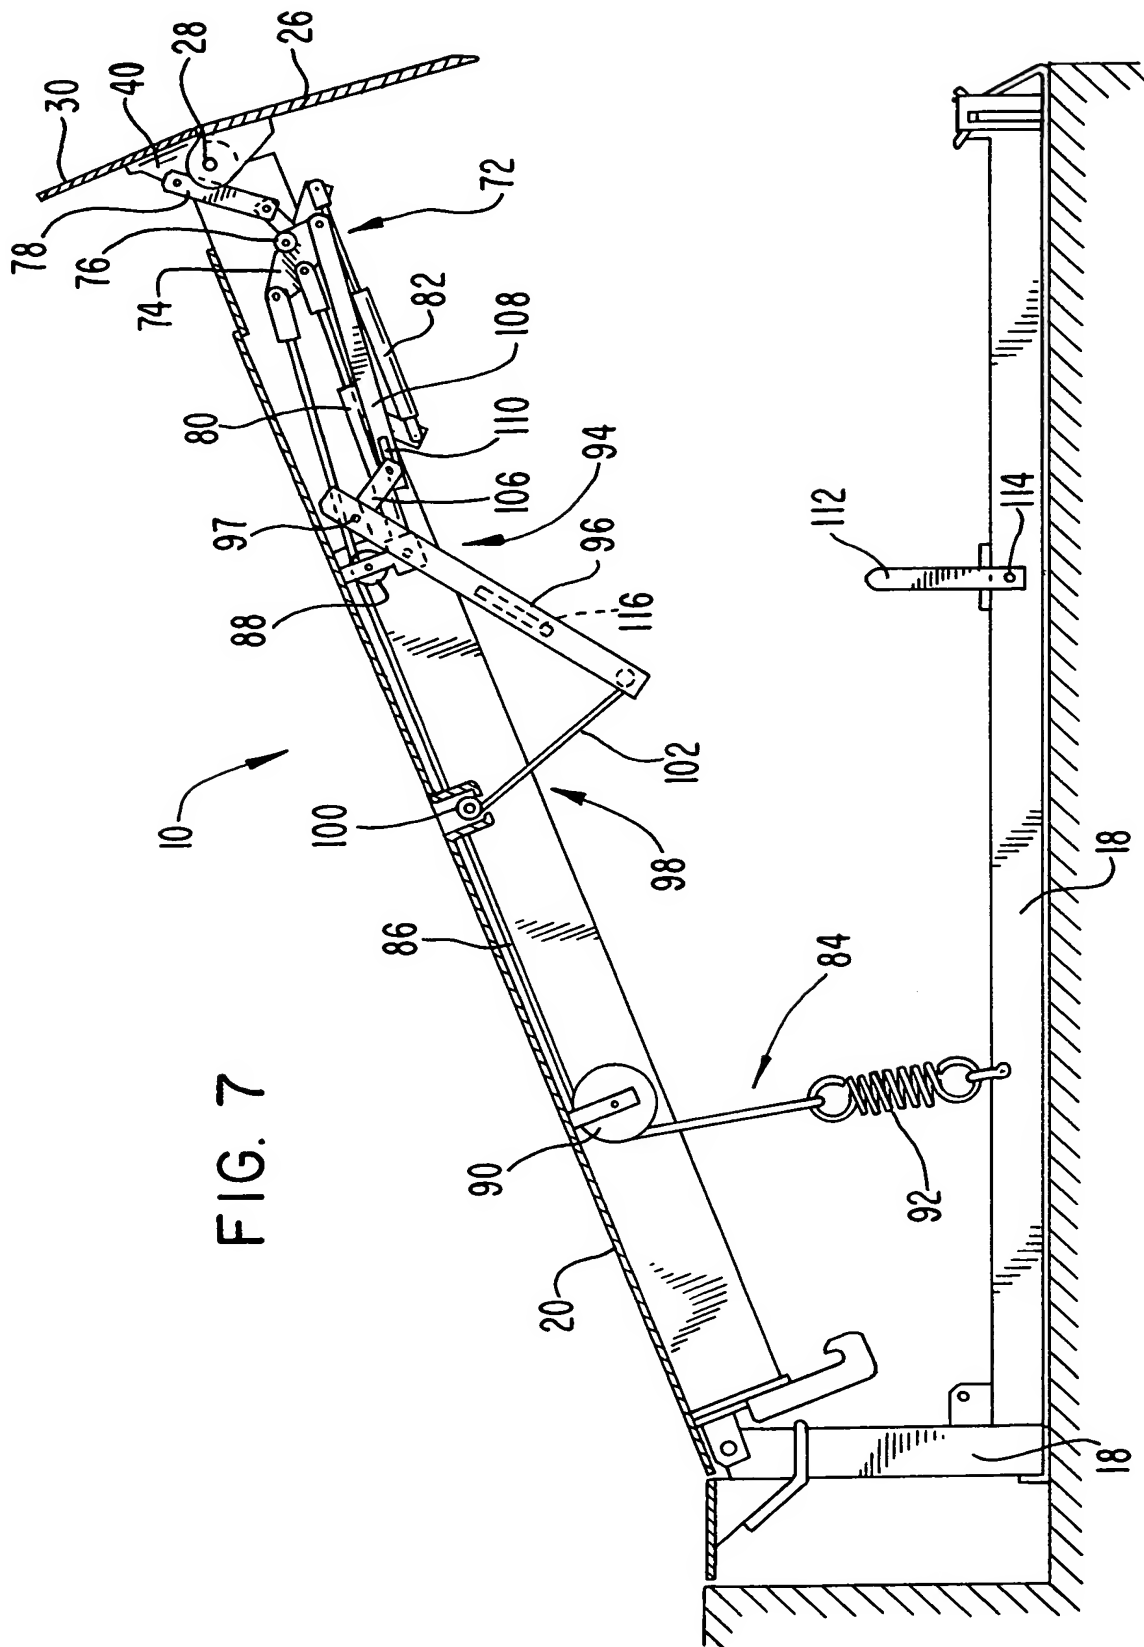

Application No.: 10/071,595
Inventor: Douglas H. MASSEY, *et al.*
Filed: February 8, 2002
Formal Drawing Sheet 8 of 12
Figure 8

FIG. 8

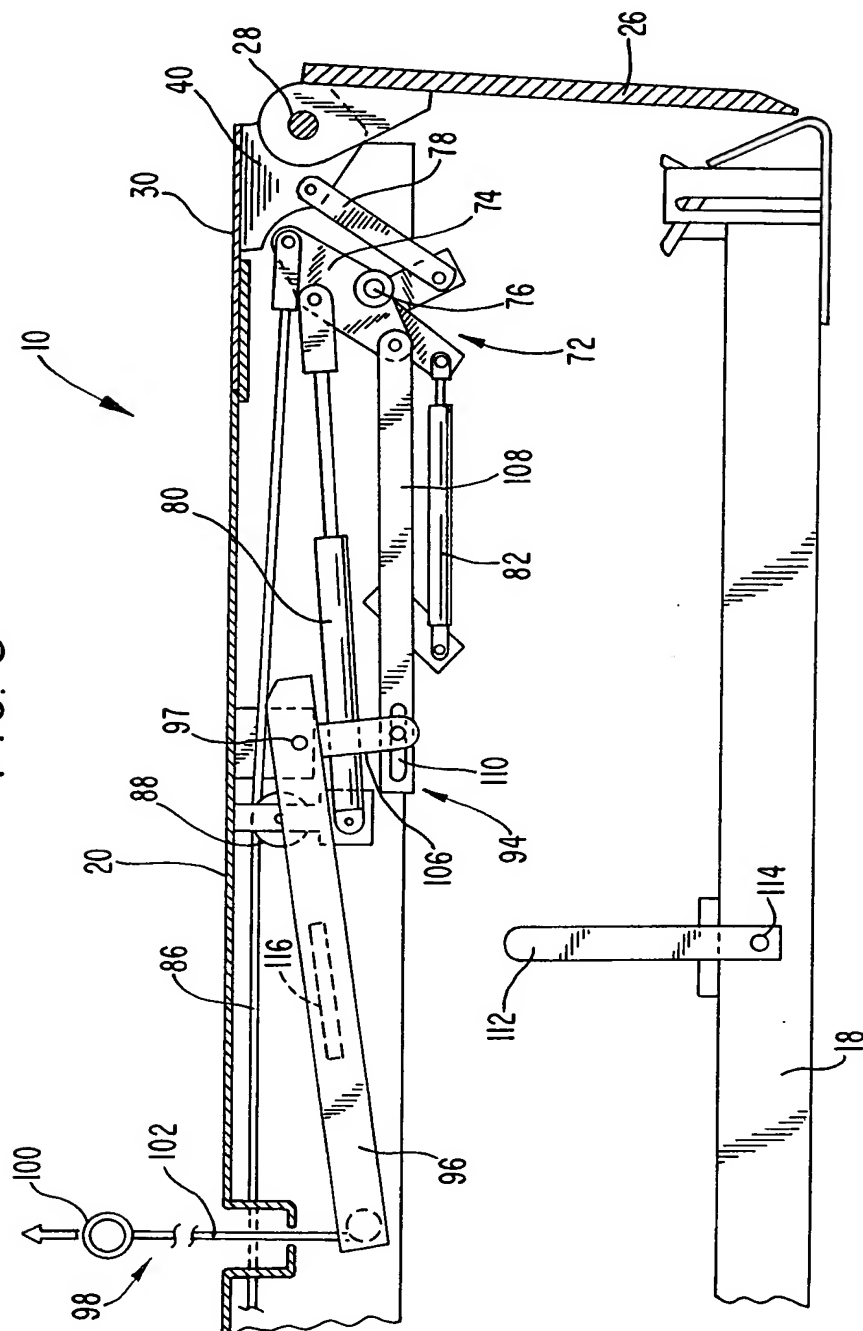

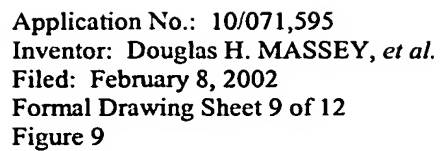


This diagram shows a complex mechanical assembly, possibly a door hinge or latch system, mounted between two vertical surfaces (18). The assembly includes a main body (10) with multiple internal components. Key parts include a spring (92) connected to a lever arm (98), which is pivoted at point 100. Other components shown are rollers (76, 80), guides (72, 82), and various structural supports and pins (e.g., 14, 20, 26, 30, 40, 74, 86, 90, 94, 96, 102, 106, 108, 110, 112, 114, 116, 118). The drawing uses hatching to indicate different materials and cross-sections.



Application No.: 10/071,595
Inventor: Douglas H. MASSEY, *et al.*
Filed: February 8, 2002
Formal Drawing Sheet 10 of 12
Figure 10

FIG. 10

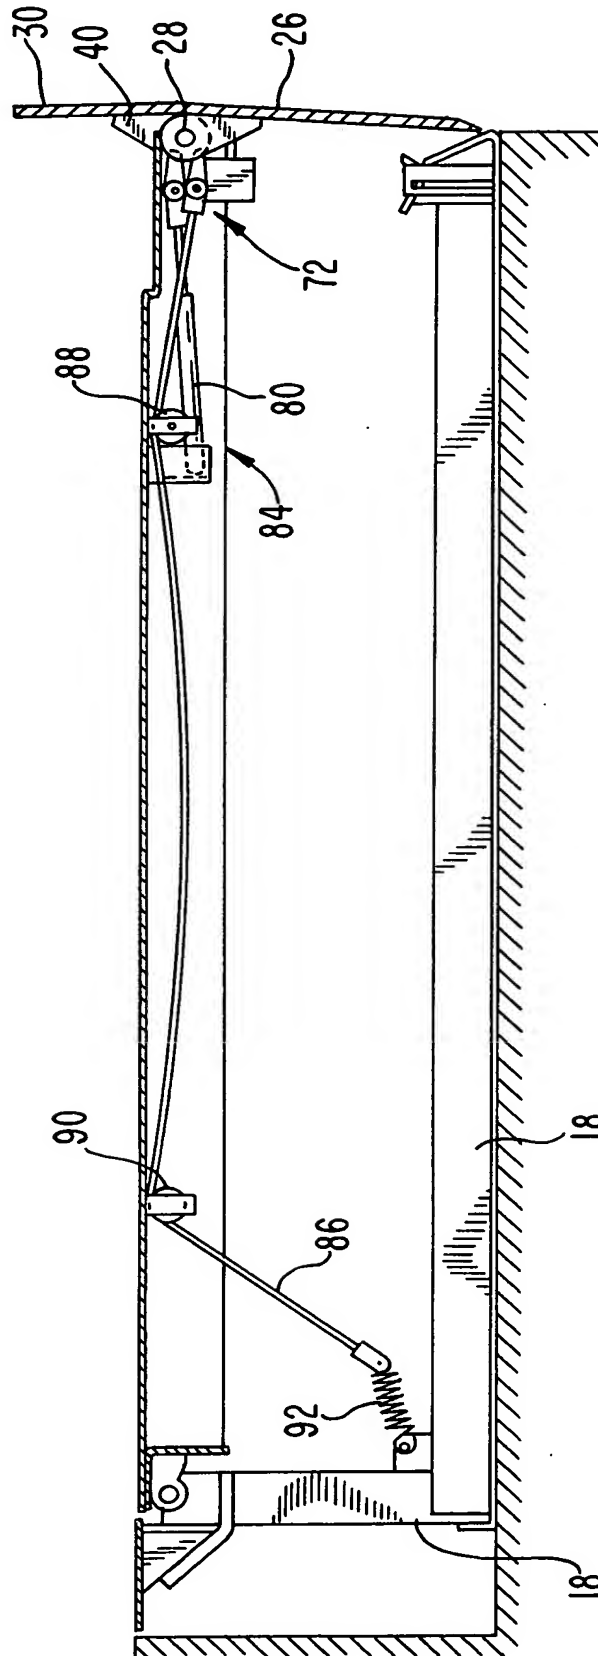



Application No.: 10/071,595
Inventor: Douglas H. MASSEY, *et al.*
Filed: February 8, 2002
Formal Drawing Sheet 11 of 12
Figures 11 and 12

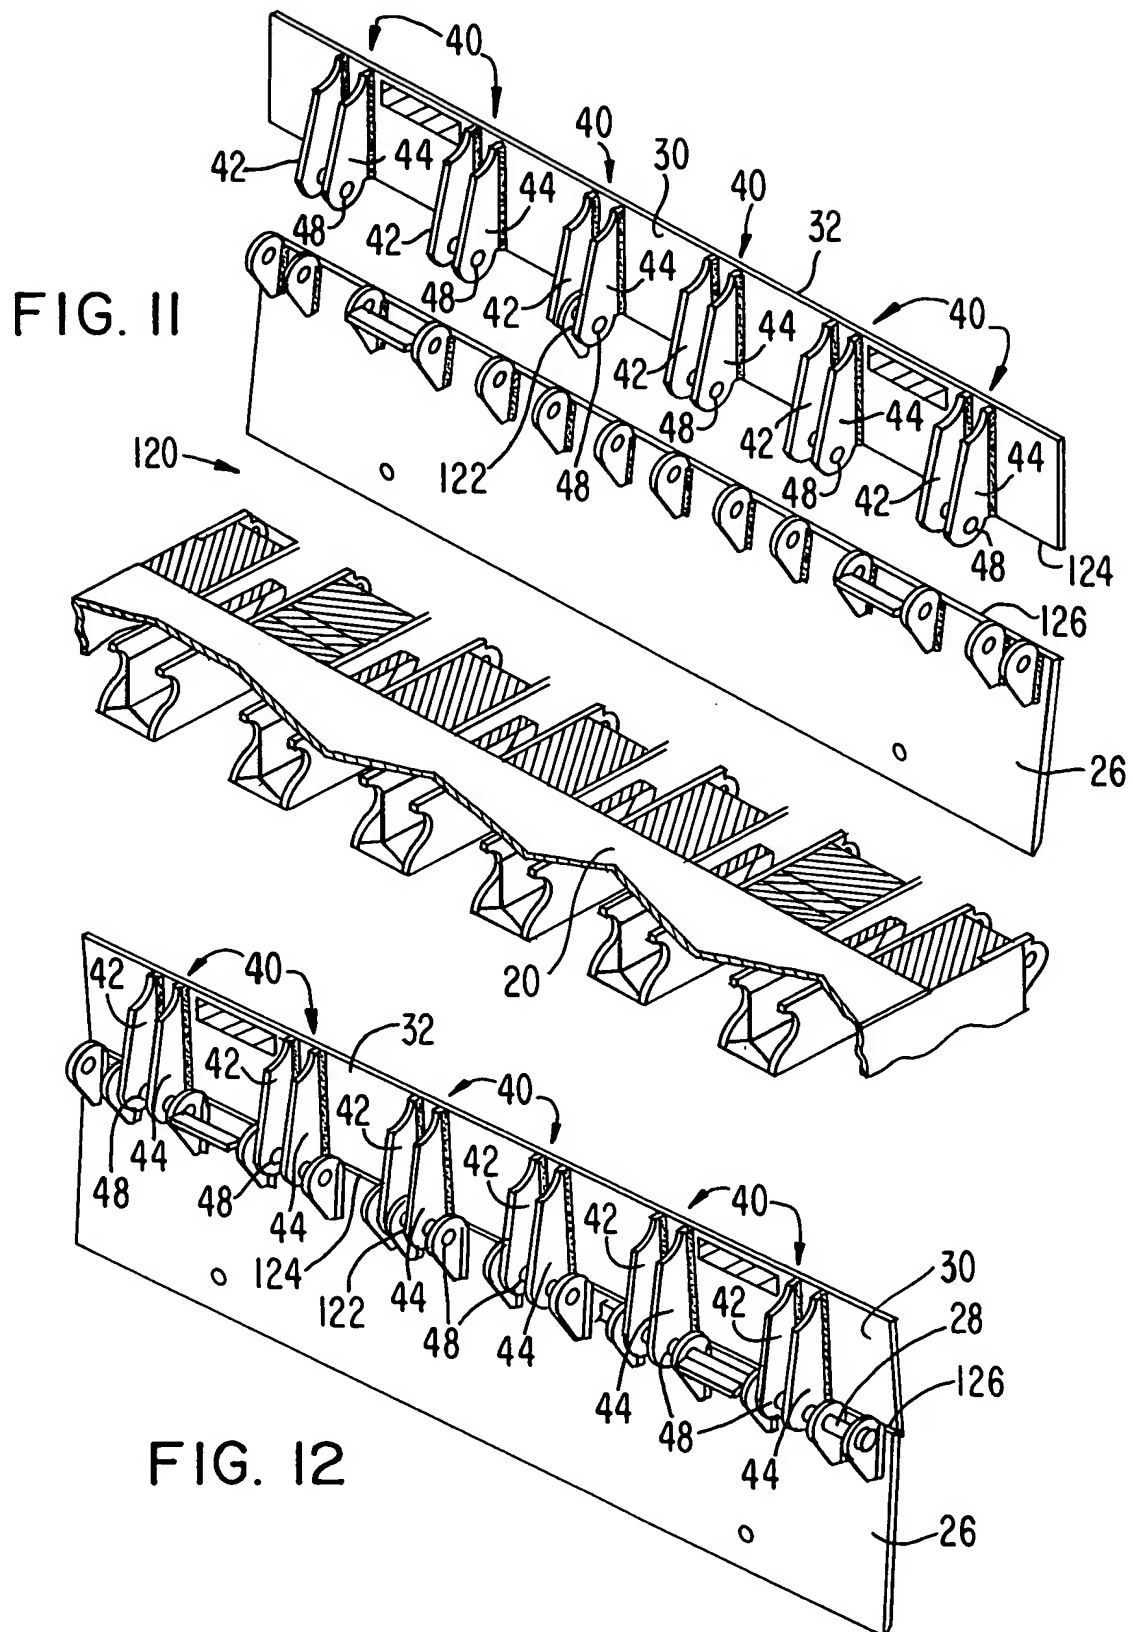




FIG. 13

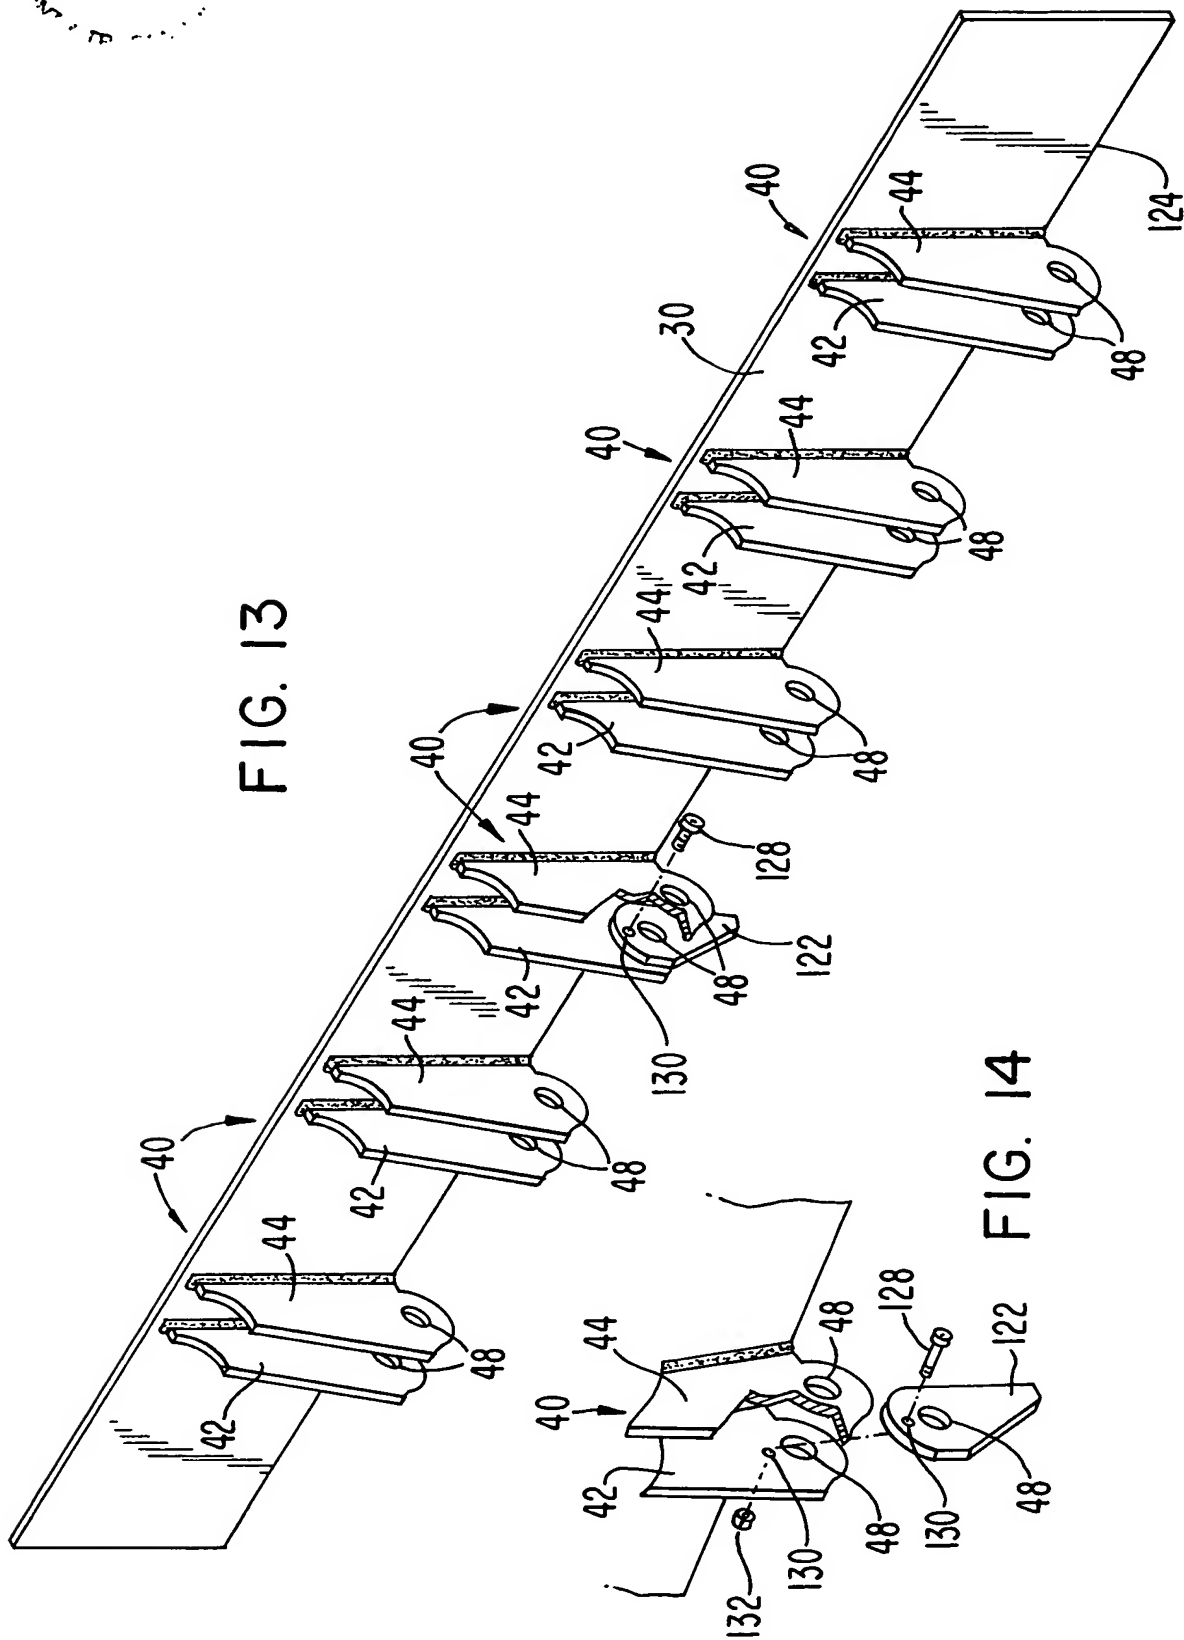


FIG. 14

